

# RAVAS RCS Hy-Q-52

Hydraulic scale for forklift trucks and reach trucks



## BENEFITS

- High accuracy hydraulic scale
- User friendly 5" touch display
- Intuitive full color touch display guides the user
- Easy calibration due to optimal calibration menu
- Overload indication in the display
- No manifold block: easy and cost efficient installation
- For use in combination with rotators and/or clamps
- Less sensitive to changes to load center point
- Suitable for rough applications

Top quality

Indestructible



Step  
into  
the  
future

**RAVAS**

## FUNCTIONS

- Manual zero correction
- Self-learning zero correction
- Gross/Net weighing
- Tare memory for 10 values
- ID-code entry for 4 ID-codes with 10 preset codes (each max. 14 characters alpha-numeric)
- 10 totalizing registers
- Internal clock for date and time
- On board:
  - RS232 port connection for printer
  - USB output for data transfer (with USB Stick)
  - Free COM1 for Wifi or RS232
  - Free COM2 for Wifi or RS232
  - Connectivity for RAVAS Indicator App
- The USB output can also be used to connect a bar-code scanner
- Overload indication based on actual hydraulic pressure
- Error message in display incl. logging

## STANDARD SPECIFICATIONS

- Capacity 5,000 lb to 200,000 lb
- Graduation
  - 5 lb at 5,000 lb capacity
  - 10 lb at 10,000 lb capacity
  - 20 lb at 20,000 lb capacity
  - 50 lb at 50,000 lb capacity
  - 100 lb at 100,000 lb capacity
  - 200 lb at 200,000 lb capacity
- System tolerance +/- 0.2 % of the scale capacity
- Display full-color 5" touch display
- Keyboard display mode defines the available keys
- Protection class IP65
- Power supply 9Vdc - 100Vdc input, built-in regulator / convertor board
- Dimensions indicator L x B x H = 3,35 x 6,5 x 4,53 inch


## SYSTEM PACKAGE

- Hy-Q-52 indicator with 5" touch display
- RAM indicator mounting support
- Oil pressure sensor G $\frac{1}{4}$ " BSP male thread
- Metal strip with 2 sensors for mast mounting
- Magnet to be installed on the carriage plate
- Installation and calibration manual
- Operator manual

## HOW RAVAS RCS HY-Q-52 WORKS

The metal strip with the two magnet sensors has to be mounted on the mast to measure the lifting and lowering speed of the carriage plate. When the carriage plate passes the trajectory between the two sensors, the indicator samples the hydraulic pressure output of the sensor approximately 1,000 times and calculates an average value. The weighing will be done UP and DOWN: the load is lifted, and then lowered, passing the two sensors within a predefined speed bandwidth. If the RAVAS RCS HY-Q-52 is installed on a reach truck (or stacker truck) where the hydraulic pump is used for re-generating power during lowering, the menu and calibration should be set to weighing in UP-mode only.

Warning: the +/- 0.2% tolerance can only be guaranteed if the truck mast is in good condition.

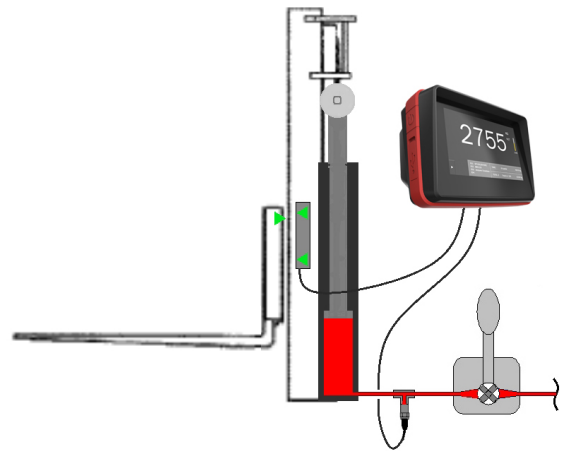

## OPTIONS\*

- Thermal or matrix printer
- 2 additional COM-ports for RS232, WiFi connection or for transfer to devices that have Bluetooth® technology
- 1D USB bar-code scanner